

URBAN  
planning  
range



URBAN, PUBLIC & PRIVATE DECORATION



PRODUCER

PROTECTION

# VIADÉCOR Range

**DECORATIVE, PERFORMANT & PERSONALIZED COATING**  
for Urban, public and private road works.


**NEW PLANNING or RENOVATION.**

In **URBAN AREAS** : Pedestrian streets, places, pavements, school yards...  
In **TRAFFICKED AREA** : Crossroads, car parks, bus lane...

A range adapted for domestic and commercial applications :  
patios, houses or garages, entrances, pathways and car accesses...

Set your imagination free !

Create patterns and associate different coatings and different colors.

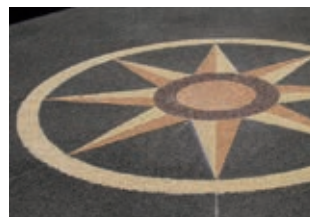

SYSTEM

## RESIN BONDED GRAVEL

**Fluid methacrylate resin** associated with colored aggregate or colored silica  
Used for **road, urban and pedestrian applications.**

This system is suitable for :

**Danger zones, pedestrian crossings, school exits, slow down zones, traffic islands...**

HIGHLIGHTS

- Highly slip resistant
- High resistance against intense traffic
- Realisation of patterns and designs
- Available in a wide range of colours

RESIN CHOICE

LOOK AT RESIN RANGE

- **HERCULES**
- **3S ROUTE GRIP**
- **STAR ENDUIT COLOR**

MARBLE AGGREGATE

- **Grading 2.5/5**  
for trafficked or non-trafficked areas

- **Grading 1.25/2.5**  
for non-trafficked areas



PINK CORAL



YELLOW



RED OXIDE



WHITE LEZ

ASK FOR OTHER TINTS

APPLICATION METHODS

For a complete application, consult our technical data sheet

- 1** Prepare the substrate
- 2** Apply the resin
- 3** Scatter the aggregates
- 4** IN OPTION Apply MTA lacquer



# COLOURED ZONES

## RESINS

### Decorative resins tinted in mass and slip resistant.

Allow to realize roads, urbans & private applications : access ramp for parkings, bridges, platforms, bicycle lanes, commercial zones...

NAME & PRODUCT DESCRIPTION	Aspect	Dosage rate	Curing	Tint	Packing
<p><b>HERCULES</b></p> <ul style="list-style-type: none"> <li>Intended to stick prefabricated elements or aggregates.</li> <li>Two-component cold plastic resin</li> <li>Methacrylate resin</li> <li>Good adhesive</li> <li>High resistance</li> </ul>	Fluid Autosmoothing	indicative dosage 4 à 6 kg/m <sup>2</sup> .	at 20°C and under 65% of relative humidity <b>Touch dry</b> 30 minutes <b>Reopening to road traffic</b> 45 min. à 1h30	COLOR-FREE	<b>KIT</b> 8kg <b>KIT</b> 24kg
<p><b>3S ROUTE GRIP</b></p> <ul style="list-style-type: none"> <li>Intended to stick aggregate &amp; realize coloured zones.</li> <li>Two-component cold plastic resin</li> <li>Methacrylate resin tinted in bulk</li> <li>Highly slip resistant</li> <li>Excellent durability</li> <li>Allow to cover large surfaces.</li> </ul>	Autosmoothing	4 à 6 kg/m <sup>2</sup> .	<b>Touch dry</b> 30 minutes	COLOR-FREE or Ask for TINT	<b>KIT</b> 24kg
<p><b>3S ROUTE ENDUIT COLOR</b></p> <ul style="list-style-type: none"> <li>Realization of security lanes or coloured patterns.</li> <li>Two-component cold plastic resin</li> <li>Highly slip resistant</li> <li>High security level for pedestrian and bikes</li> <li>Soft and comfort application.</li> </ul>	Fluid	3 à 4 kg/m <sup>2</sup> .	<b>Touch dry</b> 10 minutes	Ask for TINT	<b>KIT</b> 8kg
<p><b>3S ROUTE DECOR</b></p> <ul style="list-style-type: none"> <li>Intended to stick aggregates and realize coloured zones</li> <li>Two-component cold plastic resin</li> <li>Methacrylate resin</li> <li>Tinted in bulk</li> <li>Highly slip resistant with added charges</li> <li>Excellent durability even with intense traffic</li> <li>Fast application</li> </ul>	Very fluid	1 à 2 kg/m <sup>2</sup> .	<b>Touch dry</b> 20 minutes	Ask for TINT	10kg
<p><b>STAR ENDUIT COLOR</b></p> <ul style="list-style-type: none"> <li>Realization of decorative zones with aggregates or glass beads</li> <li>Three-component cold plastic resin</li> <li>Tinted in bulk</li> <li>High resistance</li> <li>Soft &amp; comfortable for use thanks to mechanical application</li> </ul>	Very fluid	1 à 3 kg/m <sup>2</sup> .	<b>Touch dry</b> 15 minutes	COLOR-FREE or Ask for TINT	<b>KIT</b> 40kg
<p><b>AQUA GRIP</b></p> <ul style="list-style-type: none"> <li>Coloration and protection of bituminous surfaces</li> <li>Interior &amp; exterior for light traffic</li> <li>Durability</li> <li>Highly slip resistant</li> <li>Soft &amp; comfortable for use thanks to mechanical application.</li> </ul>	Very fluid	2 kg/m <sup>2</sup> .	<b>Touch dry</b> 12 Hours <b>Pedestrian traffic</b> 48 Hours <b>Light traffic</b> without parking	BLACK GREEN RED Ask for TINT	20kg

## SLIP RESISTANT CHARGES

■ GLASS BEADS ● GEM 500 ● GEC 850  
For trafficed or non-trafficed areas

■ SILICA ● DIAM 0.1/0.6 recommended for thin film or DIAM 0.7/1.3

# PAINTS

Coloured paints allow to valorise out and decorate : bicycle lanes, tracks, school areas, traffic islands, parking spaces...



**Good resistance to abrasion and UV rays.**  
**Really good holding on mineral oil, greases and tars.**  
**Fast curing.**  
**Perfect grip for new or old hydrocarbon driveway surfaces**

NAME & PRODUCT DESCRIPTION	Dosage Rate	Drying	Packing
<b>3S ROUTE COLOR</b> WITH SOLVENT	700 g/m².	at 20°C and under 65% of relative humidity <b>Touch dry</b> 8 minutes	25kg
<b>ECO COLOR</b> TOLUENE FREE			7kg 25kg
<b>FAST MARK COLOR</b> WATER BASE	660 g/m².	<b>Touch dry</b> 5 minutes	7kg 25kg

STANDARD TINTS




SYSTEM

## PERMEABLE RESIN BOUNDED COATING GRAVIDÉCO

**Fluid polyurethane resin associated with aggregates.**

This system allows to realize a draining ground  
 Realization of ornamental spaces, pathways, school areas, bicycle lanes.

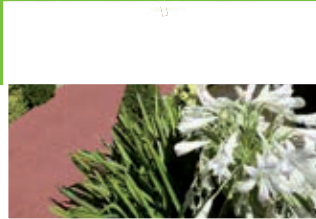

HIGHLIGHTS

**A totally permeable 3 cm thick coating**  
**High durability**  
**No maintenance**  
**Less use of herbicide**

RESIN

NAME & PRODUCT DESCRIPTION	Aspect	Dosage Rate	Drying	Tint	Packing
<b>GRAVIDECO</b> <ul style="list-style-type: none"> <li>Two component polyurethane resin</li> <li>Solvent free</li> <li>Very good adhesion</li> <li>Rapid grip</li> <li>Excellent softness</li> </ul>	Very fluid	indicative dosage 1kg/m².	at 20°C and under 65% of relative humidity <b>Touch dry</b> 1 hour	COLOR-FREE	KIT 10kg
<b>GRAVIDECO MONO</b> <ul style="list-style-type: none"> <li>One component polyurethane resin</li> <li>Solvent free</li> <li>Comfortable application methods</li> <li>Rapid grip</li> <li>Very good adhesion</li> <li>Excellent softness.</li> </ul>					

- **Gridding 2.5/5** for trafficked or non-trafficked areas
- **Gridding 5/8**



PINK CORAL



YELLOW



RED OXYDE



WHITE LEZ

ASK FOR OTHER TINTS

For a complete application, consult our technical data sheet

1

**Prepare**  
the substrate

2

**Mix the kit**  
and the **aggregates**

3

**Lay**  
the obtained mortar

4

**Trowel**  
finish the blended aggregates  
to a smooth level finish

MARBLE AGGREGATE  
rolled  
+ washed  
+ dried

APPLICATION METHODS



SYSTEM

# PAVER SYNTHETIC

## Methacrylate resin & marble aggregate

Its soft use combined with its hard wearing properties makes it an ideal ornament coat for : Slow down zones, gyratory, pedestrian ways, demarcation strips, traffic islands, pathways, driveways...

### HIGHLIGHTS

**Produced in bulk** which guarantees : **a long-life aesthetic product.**  
**a slip resistant property.**

**Its composition,** allows : a high **stability**  
**not to deform itself,** even under intense traffic.  
a mechanical behaviour **hard and flexible.**

### TECHNICAL SPECIFICATIONS


Excellent result	Really good resistance	High level
▶ <b>ATTEMPT SHOCK RESISTANCE</b> NF T30-039 No cracks No unsticking after impact No deformation	▶ <b>ATTEMPT ABRASION</b> NF T30-015 Obtained value after 50 cycles Total erosion of the millstone 300g/m <sup>2</sup>	▶ <b>ATTEMPT SLIP RESISTANCE, DURABILITY</b> NF P18-578 After 5 000 000 wheels passages the coefficient of slip resistance SRT measured according to the norm is higher than 0.65

### GLUING WITH RESIN

#### HERCULES

look at resin range and consult our technical data sheet.

### MODELS

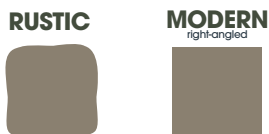

### DIMENSIONS & PACKING

**Pavers are pre-cut and packed in 2m<sup>2</sup> cartons.**

**thickness : 7 mm +/- (2 mm)**

- ▶ 10 X 10 cm.      ▶ 15 X 15 cm.
- ▶ 12 X 12 cm.    ▶ 15 X 20 cm.

### INFO

#### WE CAN PRODUCE PAVERS

Up to 50 x 50 cm  
Other colours on request  
for a minimum of 100m<sup>2</sup> orders.

### COLOUR RANGE

▶ STONE COLLECTION		AGGREGATES 0.6-1.25	
CREAM	WHITE	GREY	RED OXYDE
▶ GRANIT COLLECTION		AGGREGATES 1.25-2.5	
LIGHT GREY	DARK GREY	AUTOMN RED	MARBLE WHITE
LIGHT PINK	LIGHT YELLOW	DARK YELLOW	MARBLE YELLOW
▶ ROCK COLLECTION		with SILICA 0.1-0.6	
LIGHT ROCK	MIDDLE ROCK	DARK ROCK	BROWN ROCK

### APPLICATION METHODS

For a complete application, consult our technical data sheet.

1

**Prepare**  
the support & installation



2

**Apply**  
the resin **HERCULES**



3

**Stick**  
the pavers






4

**Scatter**  
silica **0,7-1,3** for sealings



www.ore-peinture.fr

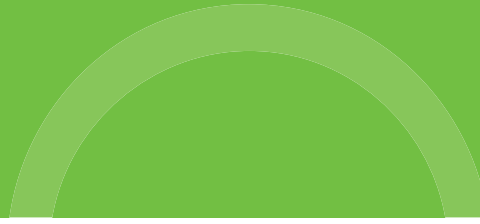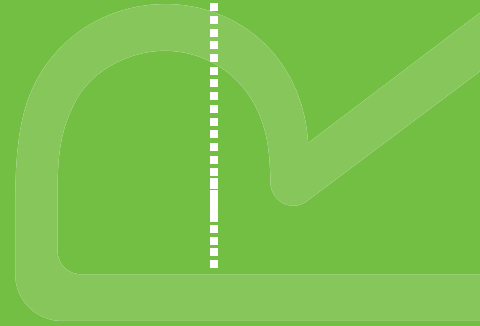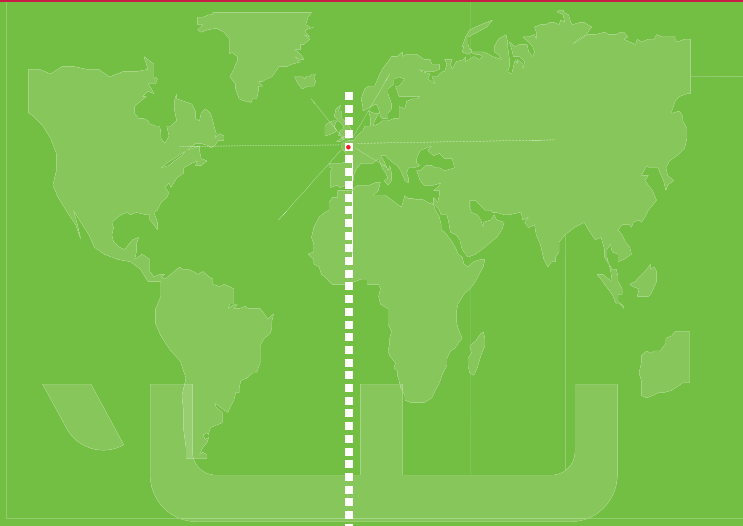

DISTRIBUTOR



HEAD OFFICE

FACTORY - LABORATORY - TECHNICAL SERVICES

ZAC DU BON Puits - 49480 ST SYLVAIN D'ANJOU - Phone : 02.41.21.14.10 - Fax : 02.41.21.14.18