




## ELS70000 SERIES Double in line Card Dispenser w/capturing function

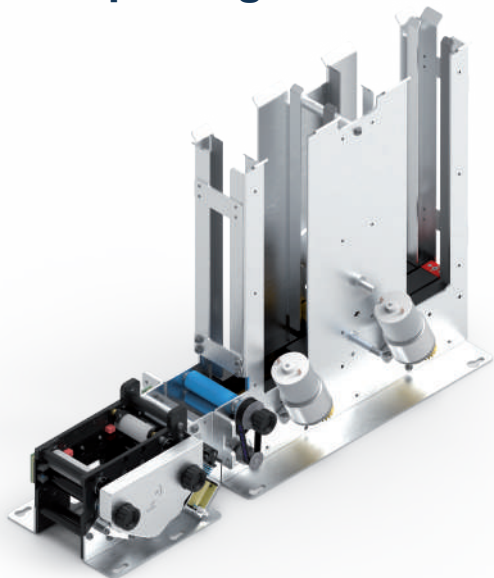

### MAIN FEATURES

- Side frame supporting cartridge and capturing module
- Double stacker
- Removable cartridge
- Stepping motor and photosensors ticket positioning
- Contactless Card Management based on Mifare Standard ISO/IEC 14443 A/B + ISO15693
- Easy card loading and maintenance
- Error card capture function
- Microprocessor based electronics
- SMD low consumption electronic circuits
- Communication by means of RS232/RS485 serial interface or USB

## TECHNICAL SPECIFICATIONS

### OVERALL DESCRIPTION

•Outline dimensions	: 300(H) x 435(L) x 130(W) mm
•Weight	: 6.0 Kg (Approximately)
•Electronics	: Specific PCB
•Stacker capacity	: 300/500/600/1000 pcs (0.8mm)
•Ticket motion	: Stepping motor
•Transport method	: Rolls
•Ticket Sensors	: Photosensors
•Barcode scanner	: CCD/ Laser or 1D/2D Image
•Output interface	: RS232 / RS485 / USB
•Power requirements	: +24V DC +/-10% 6A

### CARD/TICKET SPECIFICATIONS

•Paper	: PET and PVC card
•Length	: 85.60 mm
•Width	: 53.98 mm
•Thickness	: From 0.40 to 1.00 mm

### ENVIRONMENTAL

•Operating temperature	: From -10 to + 65°C
•Storage temperature	: From -20 to + 85°C
•Relative humidity	: From 20 to 80% (No condensation)