




CCCU – ELS50000 SERIES Magnetic Card dispenser Unit

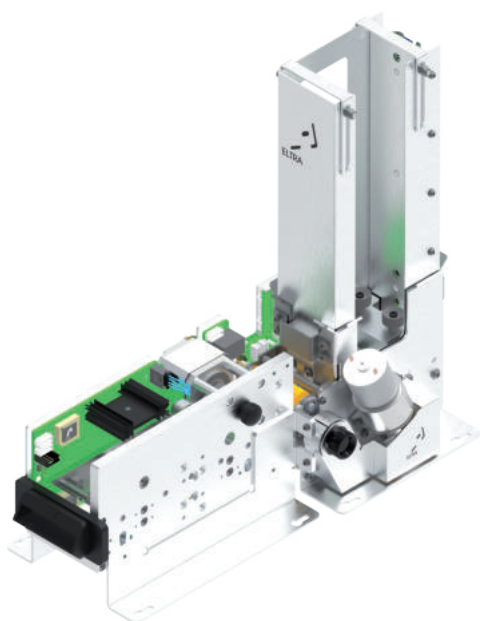

MAIN FEATURES

- Side frame supporting cartridge
- Removable cartridge
- Stepping motor and photosensors ticket positioning
- Contactless Card Management based on Mifare Standard ISO/IEC 14443 A/B + ISO15693
- Easy card loading and maintenance
- Integrated IC contactor + Controller EMV (optional)
- Microprocessor based electronics
- SMD low consumption electronic circuits
- EL2000 reader/encoder module unit
- Communication by means of RS232/RS485 serial interface or USB

TECHNICAL SPECIFICATIONS

OVERALL DESCRIPTION

•Outline dimensions	: 320(H) x 350(L) x 155(W) mm
•Cartridge	: 240(H) - 300 Cards x 0.80 mm
•Weight	: 4.5 Kg (Approximately)
•Electronics	: EL2000 PCB
•Stacker capacity	: 300/600/900 pcs
•Ticket motion	: Stepping motor
•Transport method	: Belt and rolls
•Ticket Sensors	: Photosensors
•Shredder motion	: DC gearder motor
•Output interface	: RS232 / RS485 / USB
•Power requirements	: +24V DC +/-10% 2A

CARD/TICKET SPECIFICATIONS

•Length	: 85.60 mm
•Width	: 53.98 mm
•Thickness	: From 0.30 to 1.00 mm

ENVIRONMENTAL

•Operating temperature	: From 0 to +50°C
•Storage temperature	: From -20 to +60°C
•Relative humidity	: From 20 to 80% (No condensation)