

LTI 20/20 TRUSPEED® S LASER SERIES

The ultimate laser for speed and distracted driving enforcement, crash scene mapping and smartphone apps.

The LTI 20/20 TruSpeed® S series possesses state-of-the-art technology offered at an unmatched value for the price. It's compact, rugged and weighs less than a pound.



Key Benefits

- Inconspicuous design
- Rugged exterior with tactile grips
- Simple operation
- Crystal-clear 7× optics with real-time illuminated data display



SpeedCapture App

Sync it with a smartphone for photo enforcement of:

- Speeding
- Distracted Driving
- Seat Belt Use
- HOV Lane
- Stop Sign
- Red Light



TruSpeed S Models

S: Measures speed and most affordable

Sxb: Adds mapping and has Bluetooth® communication

Se: Works in conjunction with PicoDigiCam® LR photo system

All models include:

- Carrying case
- Neck strap
- Eyepiece cover
- 2 CR 123A batteries
- Operator's manual



QuickMap 3D®

Integrate it with mapping accessories and simplified data collection software



Specifications

Weight	0.9 lb
Size (L x W x H)	5.2 x 4.5 x 2.1 in
Construction	Glass-filled polycarbonate composite
Maximum Range	2,000 ft
Speed Range	± 200 mph
Range Accuracy	± 6 in
Speed Accuracy	± 1 mph

Power	(1) CR 123A battery (12 hours of operation time)
Environmental	Water resistant; NEMA 4; IP 55
Operating Temperature	-22° to 140° F
Storage Temperature	-31° to 158° F
Eye Safety	Class 1/FDA CFR 21
Bluetooth (Sxb only)	Class 2, Ver. 2.1, Backwards compatible, 128-bit encryption, iOS/Android

LTI 20/20 TRUSPEED® LASER SERIES

The essential laser for long-range speed detection, anti-jam technology and data collection.

The LTI 20/20 TruSpeed has an ergonomic pistol grip handle, a removable shoulder stock for increased aiming stability and the accuracy you expect from an LTI laser.



Key Benefits


- Large icon keypad for easy operation with gloves
- Adjust the brightness level on the heads-up display for maximum visibility
- Enhanced aiming stability with the removable shoulder rest
- One-button weather mode and easy menu options

TruSpeed Models

Standard: Reliably measures speed

LR: Longer range with anti-jam feature
(SpeedStat software sold separately)

Upgraded 3.5× magnified sighting scope

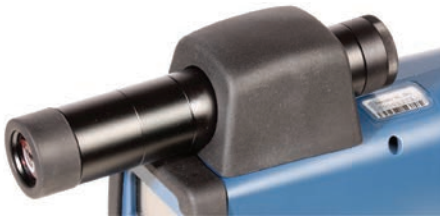

Speed Mode



Weather Mode



Continuous Mode



LCD Backlight



Test Mode




HUD Brightness



SpeedStat

Connect with SpeedStat to collect traffic statistics with time, date, direction and speed.



Specifications

Weight	2.75 lb
Size (L x W x H)	7.75 x 3 x 11.75 in
Construction	Composite polycarbonate outer shell; Aluminum internal chassis
Power	2 alkaline or NiCad rechargeable C-cell batteries (up to 25 hours of cordless operation)
Environmental	Water resistant; NEMA4 & IP55

Operating Temperature	-22° to 140° F
Storage Temperature	-31° to 158° F
Eye Safety	Class 1/FDA CFR 21
Maximum Range	Standard 2,000 ft/LR 4,000 ft
Speed Range	± 200 mph
Range Accuracy	± 6 in
Speed Accuracy	± 1 mph