

Fog-SMacs®

Visibility Sensor Station



CONTROL OF THE WEATHER SCENARIO

The climatic conditions can disrupt significantly the traffic performance.

The reduction of visibility is one of the primary causes of accidents and reduces significantly the safety conditions of the road network, the opportunity to replace to the interpretation of those driving a tool that determines with certainty the distance of maximum visibility becomes a tool essential to reduce the risk of accident. It requires that the institutions need to act promptly to inform users of the road, civil protection etc. of the possible danger.

BENEFITS

- Knowing with accuracy the distance of visibility allows to communicate the speed limit allowed.
- Automatic alert via variable message signs allows to increase the security.
- Centralized control provides the manager with all the necessary data to best decide which solutions to adopt.
- Innovative technologies for the detection of fog presence and 24 hours a day connection to SMacs® Platform.

DETECTION OF VISIBILITY'S CONDITIONS

- Wide Range
- Accuracy

MAXIMUM ACCURACY OF MEASUREMENTS

Range: 10÷2000 meters

Accuracy: (+/- 10%)

REAL TIME SENDING OF EACH DETECTION

Through GPRS Modem.

REMOTE CONTROL AND ALERTING

Through the Platform SMacs® you can manage your data and be alerted in real time to the occurrence of any critical condition.

DYNAMIC MANAGEMENT OF VMS

Through the Platform SMacs® you can communicate dynamically with variable message signs (Tool: Macs Visual) to inform which is the speed limit allowed due to the visibility on time measured, leaving no room for interpretation of the driver.

READY TO USE

Fog-SMacs® allows you to have a professional Station of visibility monitoring with the formula "Ready to Use".

The monitoring of these measurements is generally possible only through complex systems as they involve different technological components, heterogeneous among them.


Our solutions are designed to be scalable, with central units of the highest level, but shared.

This allows you to get them very cheap and build a fully scalable system.

The goal is to spread these tools to a growing number of organizations, including also the small towns that need to monitor just a single spot.

The device installation on the road is very quick, and once installed does not require any additional configuration, the station is already ready to use, and the related data can be found out through the web, choosing who to notify in case of need.

Is available the option to provide the station with photovoltaic panel or with battery backup for supply through public lighting.

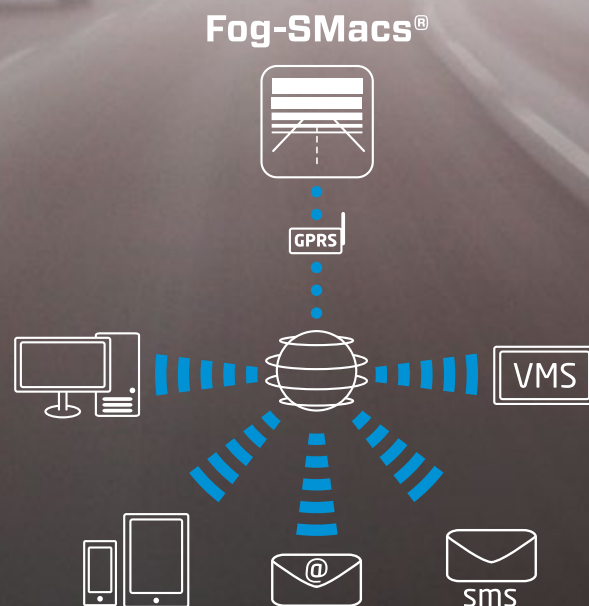

WEB ACCESS

Credentials to access to the web portal SMacs® with informations available for both the manager and for the ordinary citizen.

ALERT SYSTEM

Real Time alert at specific thresholds.

DATA STORAGE

Free access to the database to obtain the temporal trend of the monitored data for statistical purposes.

SYSTEM WIDENING

Possibility of integration with other modules and/or sensors maintaining the same platform.

SYSTEM CONTENTS

- Visibility sensor LUFFT VS-20 UMB with Manufacturer Test Certificate.
- Data acquisition station Weather-SMacs® designed and configured for your Visibility Sensor.
- GPRS data modem to enable constant communication with the Control Center (SIM not included).
- Web SW Macs® Weather to communicate and be alerted in real time on the Platform for Smart City SMacs®.
- Wiring.



HEADQUARTERS: Via Ponticello, 17 - 35129 Padova (PD) - ITALY

T. +39 049 773055

F. +39 049 8074002

T. +39 049 8599361

F. +39 049 8599215

www.lasemaforica.com

info@lasemaforica.com

www.tecsen.it

info@tecsen.it