

Universal RFID UHF reader Product family: SMART RFID





APPLICATIONS:

ACCESS CONTROL
RETAIL
LOGISTICS
CAR PARK SYSTEMS

Master 01 is an RFID UHF reader developed by a Polish-Swiss Smart Technology Group whose innovative solutions were appreciated in multiple awards.

The device utilises our own, proprietary ideas that make it one of the best RFID tools in the world. It is one of the products that make up the SMART RFID brand widely used in retail, access control, logistics, car parks, and other applications.

Master 01 has won recognition with its reliability, universality, and flexibility as regards meeting customer expectations.

TECHNICAL PACAMETECS:

Parameter	Value					
Supported protocol	ISO18000-6C (EPC Global Gen2)					
Operating frequency	UHF EU ETSI 865,6~867,6 MHz, UHF US FCC 902~928 MHz					
Transmiting power	5-30 dBm					
Max readout range	up to 20 m*					
Antenna outputs	2 x SMA (available on request 4 x SMA or 8 x SMA)					
Working mode	polling, autorunning, autorunning+, autonomous, SMART MODE					
Communication interfaces	Ethernet 10/100, RS485, RS232, Wiegand, WLAN, Bluetooth, GPRS					
Indicators	sound signal, LED					
Inputs / outputs	4x NO relay, 8x GPO, 4x GPI					
Interface	PC Application or webserver embedded					
Power supply	12 V DC or POE IEEE 802.3af					
Power consumption	10 W					
Housing	aluminum					
Working temperature	-20~+55 °C					
Dimensions	220 x 210 x 30 mm					
Weight	1 kg					

^{*} depending on antenna, ID tag and weather conditions









- ► Real Time Operating System (RTOS), fully integrable with other systems.
- Operating modes:
 - polling;
 - autorunning;
 - autorunning+
 - automatic readout of EPC and TID;
 - autonomous
 - the first protected mode in the market: SMART MODE
 - smart recognition of tags assigned to a system (regardless of EPC and TID), no database required;
 - effective protection against fake tags and tag reprogramming.

ARDWARE

- Supported protocol: ISO18000-6C (EPC Global Gen2).
- > Operating frequency: UHF EU ETSI 865,6~867,6 MHz, UHF US FCC 902~928 MHz.
- Antenna outputs: 2 / 4 / 8 x SMA.
- Communication interfaces: Ethernet (UDP, TCP), RS-232, RS-485, WLAN, Bluetooth, GPRS, Wiegand.
- Power supply: 12 V DC or PoE IEEE 802.3af, can be powered directly from a 12 V battery.
- Other digital inputs/outputs: 8x GPO, 4x GPI, 5V TTL.
- Relay outputs: 4 x NO, 12 V / 1 A load capacity.
- ➤ RFID UHF transmitter power: 5-30 dBm.
- Modulation: PR-ASK.
- RFID UHF receiver sensitivity: -85 dBm.
- RFID UHF module operating mode: monostatic.
- Power consumption: 10 W.









- Via a website (from a computer, tablet or smartphone).
- Via an application.



- > SDK:
 - Windows drivers in .Net;
 - a library compatible with all languages supported by the CLI runtime (ECMA-335);
 - example source code available in C++ and C#.
- > Fully documented protocol.



- Network settings:
 - static or DHCP setup;
 - selectable communication port (UDP/TCP);
 - SNTP time server settings;
 - selectable web server port.





► RFID:

- selectable frequency channels (4, 7, 10, 13) guarantee correct operation of multiple readers in parallel;
- individual power settings for each antenna (for read and write operations);
- configurable separate durations for individual read and write operations;
- definition of the set of tags identified by the reader based on a selected memory bank (EPC, TID, USER MEMORY);
- fully configurable Gen2 protocol parameters (Session, Target, M value, Q value);
- programming or reprogramming of any or selected tag (based on EPC, TID or USER MEMORY) also via a website;
- preview of read tags via a website;
- deactivation (kill) and password protection of a selected tag;
- system calibration with clear RSSI graphs.

Wiegand:

- fully configurable interface parameters (mode and time characteristics);
- configurable number of channels (1 to 4);
- mapping of specific antennas to channels (1 to 1, 2 to 1, 4 to 1 and 8 to 1);
- configurable lockout time for a transmitted identifier;
- 5 V logic.

Autonomous mode:

- configurable prefix and identifier length for a group of tags (1 to 4 bytes);
- software NC relay mode available;
- mapping antennas to relays;
- configurable relay closed (open) time to adjust it to any system;
- optional additional conditions before granting access (such as signal from an induction loop or a photocell);
- logs for each event, also via a website.

Other:

bootloader firmware upgrade by the user.









- ► Aluminium housing.
- Installation: DIN rail or installation openings on the housing.
- Weight: 1 kg.







- Retail Innovations.
- Innovation Laurels.
- Leader in New Technologies.












AVAILABLE MODELS:

Model	Relay outputs	Ethernet 10/100	POE	RS232	RS485	Wiegand	WiFi	Bluetooth/ Beacon	GPRS	ZigBee
	4	✓	~	v	✓	~	×	×	×	×
ts ts	4	Y	~	~	~	~	~	×	×	×
outputs outputs outputs	4	~	Y	v	~	v	×	Y	×	×
	4	~	~	v	v	v	×	×	v	×
antenna antenna antenna	4	~	~	v	v	v	×	×	×	~
- 2 ar - 4 ar - 8 ar	4	~	v	v	~	v	v	×	~	×
2.0 - 4.0 - 8.0 -	4	~	~	V	~	V	×	Y	v	×
- 10	4	~	~	~	~	V	~	×	×	~
Master (Master (Master (4	~	~	~	~	~	×	v	×	~
Mas Mas Mas	4	~	~	V	~	~	V	V	~	×
	4	~	~	V	~	~	~	~	×	

MASTEC 01 is:

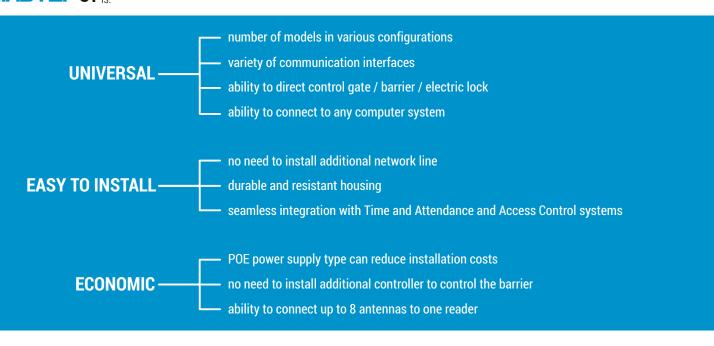

Standards compliance: EN 302-208, EN 301-489, EN 60950, EN 50364