

Parking barrier PS Platinum

Future-oriented access control based on
more than 40 years of know-how




bebarmatic®

FIRST CLASS PARKING

Parking barrier PS Platinum

The parking barrier PS provides protection of blocking widths up to 4.0 m without interfering impact fork or hinged support.

- Galvanized steel chassis with powder-coated aluminium cladding
- Electro-mechanical drive with jolt-free movement
- Opening speed 1.5 s up to 3.0 s, depending on the requested boom length
- Internal mechanical locking of the barrier boom in its final positions
- Securing of premises even in case of power failure. In case of emergency easy opening by releasing the integrated sliding clutch
- Frequency converter control for 230 V AC power supply
- Slot for loop detector
- Standard colour of housing: side parts RAL 9003 (signalwhite), cover RAL 7042 (traffic grey A)

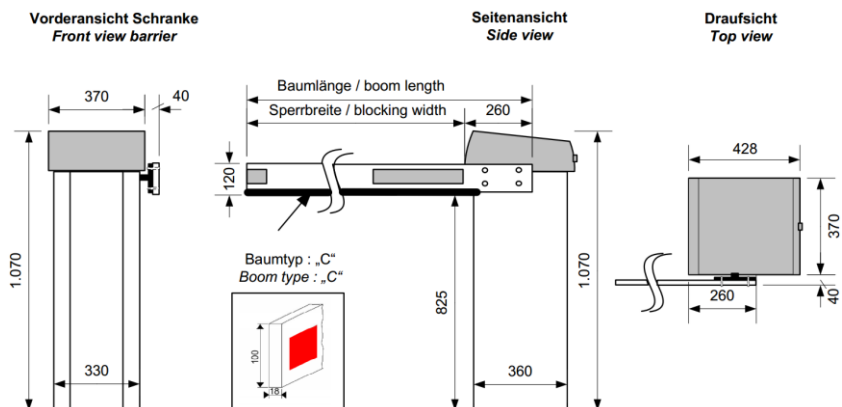

Technical data

Boom length	Self-supporting up to 4.0 m
Opening time	1.5 to 3.0 sec
Main supply	230 V / 50 Hz
Power input	370 Watt
Weight	approx. 70 kg (incl. boom)
Protection class	IP54
Final positions mechanically locked	Yes

Options and accessories

- LED flashing lights (boom)
- Safety contact strips
- Light barriers
- Radio receivers
- Key switch
- Special colours
- Access controls

Subject to technical changes

bebarmatic®

FIRST CLASS PARKING

bebarmatic Parksysteme GmbH

Vinckeweg 15
47119 Duisburg
www.bebarmatic.de

Phone: +49 203 800 23 - 0
Fax: +49 203 800 23 - 33
Mail: info@bebarmatic.de



Rev 01/2019