

Vertical sliding arrow – HSP 15

Space-saving with full warning effect



EN

Vertical sliding arrow – HSP 15

Space-saving with full warning effect

The newly developed sliding arrow completes our product range for municipalities, construction yards and landscape gardeners. In case the installation of a standard collapsible light arrow HKLPK 15 is not suitable, we do provide the perfect solution: the vertical sliding arrow can be mounted on the vehicles' platform or behind the driver's cabin.

- ✓ extremely corrosion-resistant due to a stainless steel frame
- ✓ arrow lifts up approx. 1 m
- ✓ in retracted position lamps are protected by a cover plate
- ✓ optionally you can mount additional advance warning lamps either at the arrow itself or at the vehicle
- ✓ operating time with fully charged battery, 180Ah, approx. 100 h for day operation, approx. 250 h for night operation
- ✓ no additional fuel consumption in retracted position
- ✓ no speed limit in retracted position
- ✓ no annoying wind noises in retracted position
- ✓ approved by German BAST according to TL-Warnleuchten
- ✓ conforming to EN 12352 – L8H/L8M and StVO
- ✓ EMC approved
 - 15 x RS2000 Plus LED lamps
 - 2 x MS340 LED flash lamps (either already mounted or facility for retrofitting given)
 - all functions to be selected via cable remote control (10m), included in the scope of delivery
 - automatic night dimming
 - all metal parts made of galvanized steel
 - deep discharge protection
 - incl. 6 m connection cable with battery clamps

BAST



L8H / L8M

EN 12352

WL6

TL-Warnleuchten

KBA EMV




Part No.	Product	BAST	PQ
21025	HSP 15 with 15*RS2000 Plus	✓	1
210251	HSP 15 with 15*RS2000 Plus and 2 MS 340 LED flash	✓	1

Recommended accessory

20828LED	MS 340 LED advanced warning (Note: for retrofitting 2 MS 340 are required)	✓	1
20246	Set for retrofitting of MS 340 – consists of: mounting support (galvanized steel elbow), cables, bolts and cable glands (MS 340 not included)		1

Part No.	Weight, kg	Dimensions retracted, H*W*D, mm	Dimensions Lifted, H, mm
21025	75	1.855 * 1.135 * 368	2300
210251	78	1.855 * 1.785 * 368	2300

Part No.	Operating voltage, V	Current consumption at 12 V, W	Electric raising / lowering actuator	Advanced warning lamps
21025	12 / 24	15	incl.	–
210251	12 / 24	17	incl.	MS 340 LED Flash

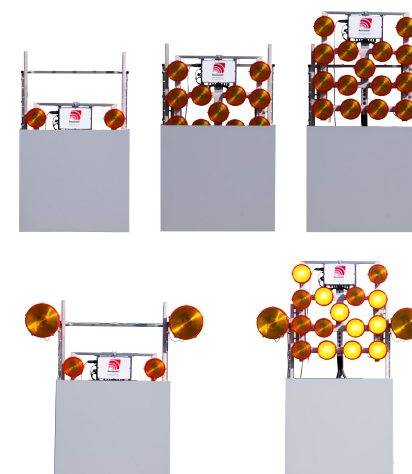

horizont group gmbh

Hornberger Weg 4-6
34497 Korbach
Germany

+49 (0) 56 31 / 565-200

+49 (0) 56 31 / 565-248

traffic@horizont.com

www.horizont.com

Specifications are subject to change without notice