



®



SHENZHEN ROAD, MING ROAD, TECHNOLOGY CO.,LTD.



®

SHENZHEN ROAD, MING ROAD, TECHNOLOGY CO.,LTD.



ADD: 3F, Building 1, Futing Industrial Zone, Zhucun, Guanlan Street, Longhua, Shenzhen.

Tel: 0086-755-2770 8545 **Fax:** 0086-755-2770 1581

Mobile phone: 0086 139 2374 3545 (wechat & whatsapp)

E-mail: szlm@szlmjt.com

Website: www.szlmjt.com www.szlm888.com.cn

Excellent quality lead is uncommon



scope of business

- Road studs series
- Delineator series
- Wireless sync facilities
- Solar warning light
- Solar traffic sign series
- Led tunnel road studs series
- Traffic signal light
- Security facility series
- Traffic sign series
- Other safety protection series

Workshop corner

Company Introduction

Shenzhen Luming Traffic Equipment Co.,Ltd. was founded in 2006, it is an export-oriented high technology enterprise that specialize in solar traffic road product and traffic safety facilities' R&D, production and sale. It has its own import & export license in 2015, and named Shenzhen Road, Ming road, Technology Co.,Ltd.


Our main products include: solar road stud, ordinary reflective road stud, solar warning light, solar safety sign, delineator, tunnel lighting sign and marker, traffic light, Anti-glare board, Anti-crash road barrier and other road safety facilities etc.

We always prepared to provide better products and services to distinguished you!


Enterprise qualification



Road studs series

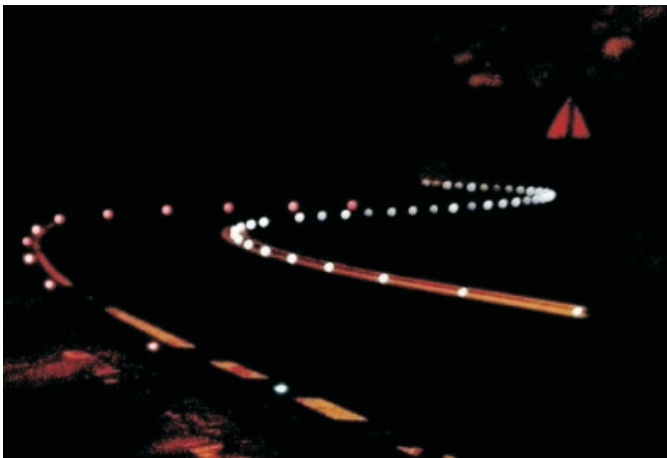


LLM-LB-01

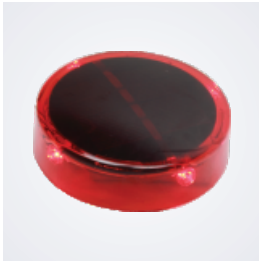

LLM-LB-8




LLM-LB-10

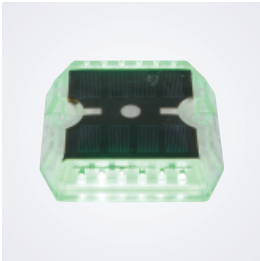

LLM-LB-12




LLM-LB-28

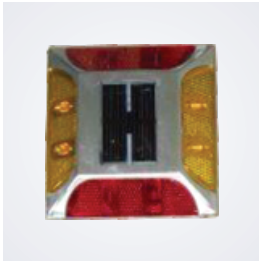

LLM-LB-03




LLM-LB-05




LLM-LB-07



LLMLB-15



名LLM-LB-04



LLM-LB-06



LLM-LB-09



LLM-LB-11

Road studs series




LLM-LB-02



LLM-LB-19



LLM-LB-24




LLMLB-18



LLM-LB-21



LLM-LB-22

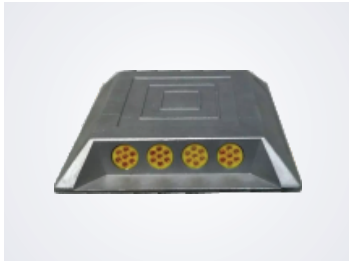

LLM-LB-23



LLM-LB-17



LLM-LB-26




LLM-LB-25

Delineator series



LLM-LkB-04

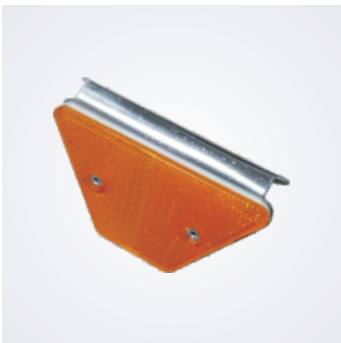


LLM-LkB-05



LLM-LkB-06



LLM-LkB-09




LLM-LkB-07




LLM-LkB-8



LLM-LkB-01



LLM-LkB-10




LLM-LkB-14



LLM-LkB-11

Wireless sync facilities

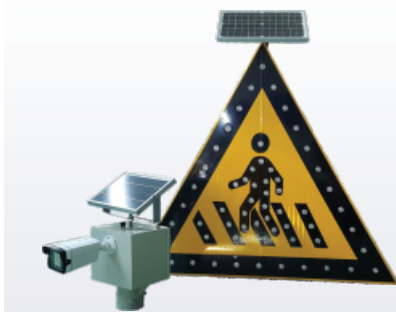

Instructions :

Light sensor: Solar signs and road studs work automatically when the environment light is less than 300 mcd

Dynamic sensor: Radar sensor can receive the signal from 200 meters far about the dynamic vehicles, and forward the signals to solar signs and road studs to work.




Fog and rain sensor: All of these solar traffic facilities can work automatically in fog or rain weather.



Infrared sensor solar sign



Electric light solar sign

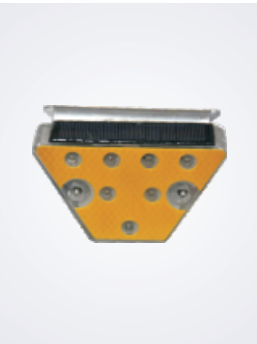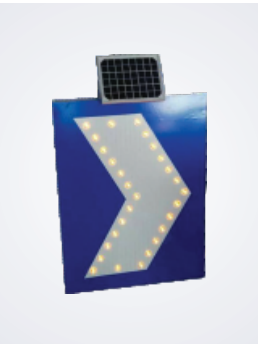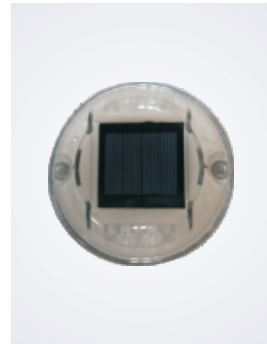

The products above can be synchronous blinking, it can adopt GPS wireless synchronous communication technology, high accuracy sync blinking, it can display the outline of the road better, and prevent the drivers from dizzy or dazzled.

Solar warning light



TYNBZP-01



TYNBZP-02



TYNBZP-03



TYNBZP-05



TYNBZP-09



TYNBZP-29



TYNBZP-26



TYNBZP-27




TYNBZP-25



TYNBZP-30




TYNBZP-33

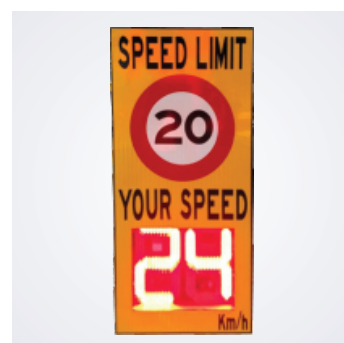

TYNBZP-34

Solar traffic sign series

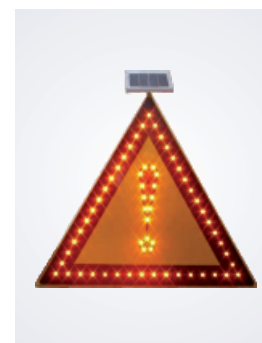

TYNBZP-07




TYNBZP-08



TYNBZP-09



TYNBZP-10

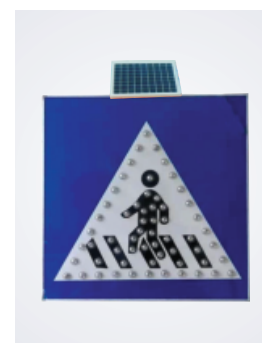

TYNBZP-11



TYNBZP-12



TYNBZP-13



TYNBZP-14



TYNBZP-15



TYNBZP-16



TYNBZP-17



TYNBZP-18



TYNBZP-19



TYNBZP-20



TYNBZP-21



TYNBZP-22

Led tunnel road studs series



LLM-YDB-04



LLM-YDB-02



LLM-YDB-06



LLM-YDB-03



- Features:**
- Light-emitting:** LED
 - Luminous intensity:** more than 6000mcd
 - Flash frequency:** 70-300 times/ minute (adjustable)
 - Work mode:** flashing or steady light
 - Light color:** yellow, red, white, blue, green
 - Work voltage:** DC24V, DC12V, 220V
 - Visual distance of 1000 meters, warning effect is very obvious.



LLM-SDYDB-09

Size: 320 * 240 * 70mm (L * W * H)
Input voltage: AC 220V.
Output voltage: DC 24V (optional 12V24, standard 24V).
Load: about 120pcs wired road stud.
Safety: Controller with electric leakage and overload protection switch.
Light-emitting method: flashing or steady lighting.
Flashing frequency: 30 ~ 300 times / minute (continuously adjustable).
Operating temperature: -30 degrees to +60 degrees.
Installation: on the wall or put flat. Tunnel induction system controller is mainly used to induce tunnel lights for highway, road.

Led tunnel road studs series



LLM-SDYDB-01



LLM-SDYDB-02



LLM-SDYDB-03



LLM-SDYDB-04




LLM-SDYDB-05



LLM-SDYDB-06



LLM-SDYDB-07

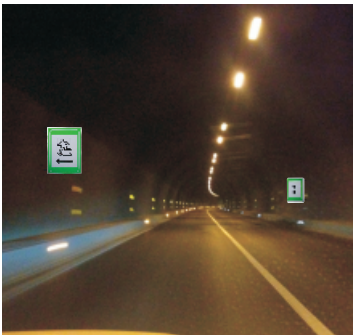

Traffic signal light

www.szlmjt.com

Security facility series


www.szlmjt.com



Plastic warning pole




Traffic cone

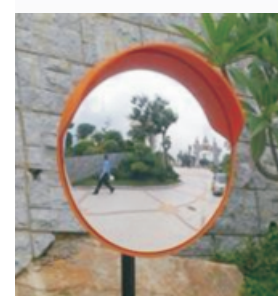

Traffic sign series

www.szlmjt.com

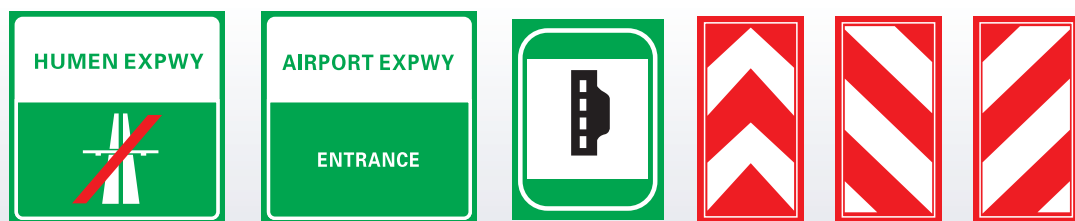

Other safety protection series

www.szlmjt.com



LLM-XHT-01



LLM-XHT-02



LLM-XHT-03



LLM-XHT-04



LLM-XHT-05



LLM-AQFH-01



LLM-AQFH-02



LLM-AQFH-03



LLM-FZT-04



LLM-SM-02



LLM-SM-03



LLM-AQFH-10



LLM-AQFH-11



LLM-AQFH-12



LLM-AQFH-13