




SOPPEC
COLORS

Technima 



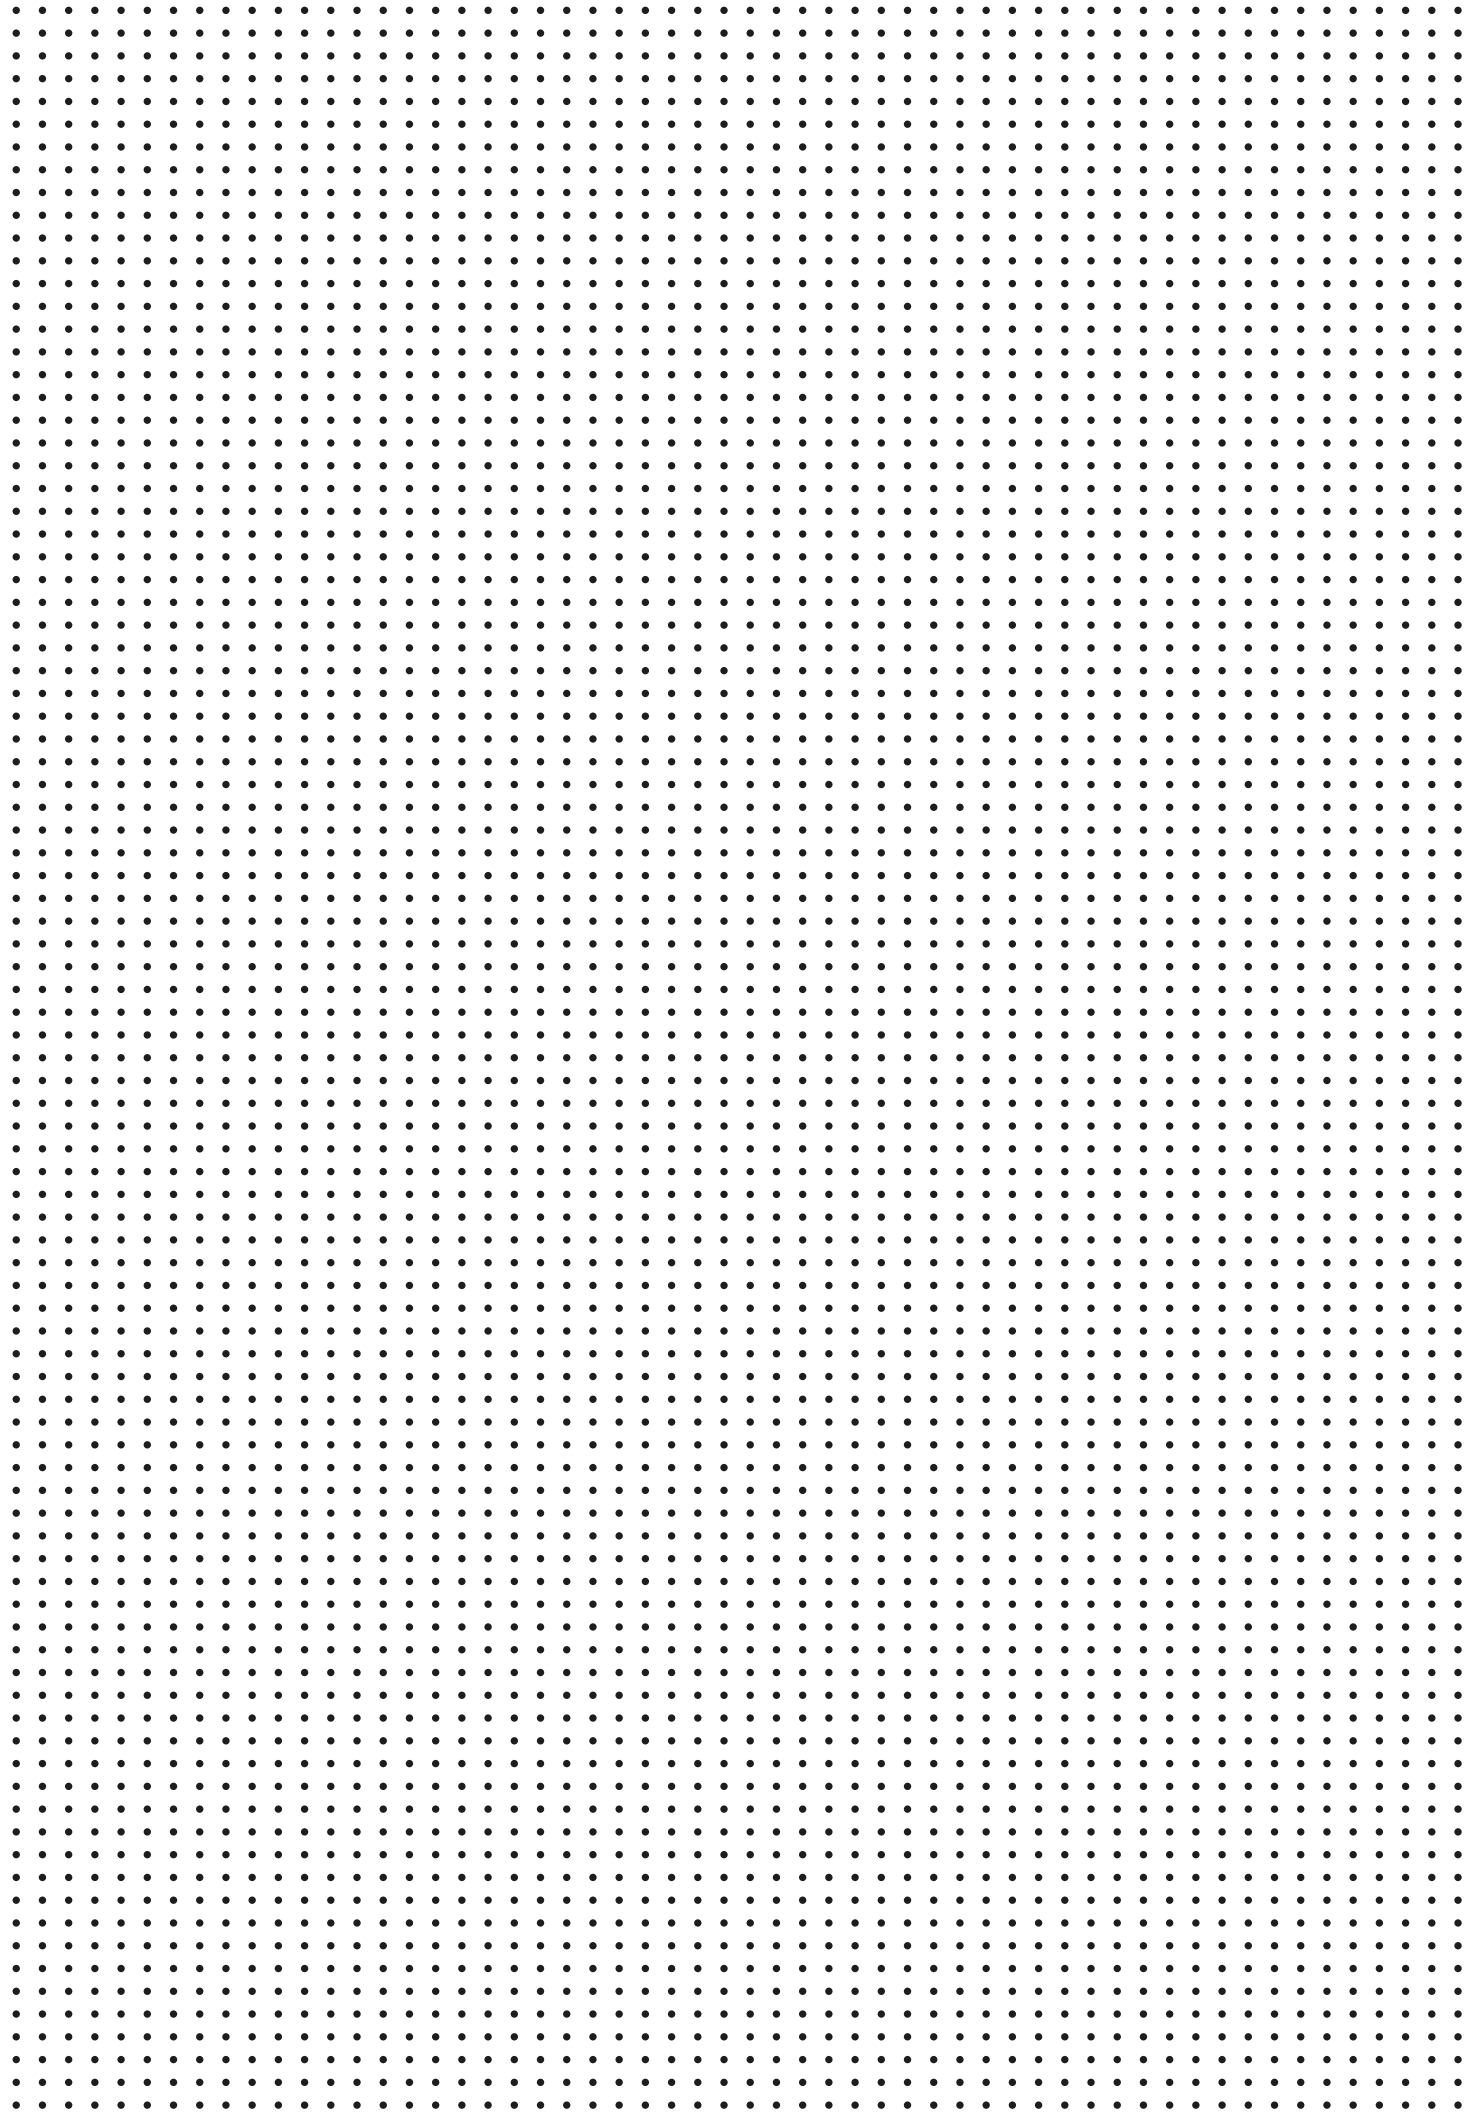

INDUSTRIAL PAINTS

In all industrial or agricultural activities it is important to be able to carry out rapid repairs to damaged paintwork, (notably to machinery and equipment in the agricultural and public works sectors), making easy-to-use industrial aerosol paints an obvious choice to apply colour, or a protective or finishing coat.

SOPPEC COLORS offers a wide range of products that meet the diverse needs of professionals working in the European manufacturing sector or the hire of agricultural and construction machinery.

In addition to their broad range of acrylic resin-based RAL paints, SOPPEC COLORS also offers a selection of industrial paints for the preparation or finishing of many very different surfaces: primers, galvanising paints, etc.

| | |
|--------------------------------------|-----------|
| | |
| GENERAL | 5 |
| INDUSTRIAL TOP COAT | 6 |
| ACRYLIC LACQUERS | 8 |
| MARKING ACCESSORIES | 11 |
| MARKING PISTOL HANDLE | 12 |
| OTHER INDUSTRIAL PAINTS | 13 |
| ADHESION PRIMER | 14 |
| RUST CONVERTOR | 15 |
| ZINC SPRAY GALVA | 16 |
| HEAT RESISTANT COATING | 19 |
| SPECIAL PAINTS | 20 |
| STAIN BLOCKER | 21 |
| SPACK SPRAY | 22 |
| | |



GENERAL RECOMMENDATIONS FOR USE

.....

Most products should be applied to a clean dry surface at room temperature (15°C to 30°C) to ensure optimal performance.

Aerosols **are used in a vertical position** (head-up). Shake thoroughly before use **and** regularly during use.

Purge head down after use to thoroughly clean the valve and nozzle.

Industrial paint aerosols must be stored in a frost-free place, ideally at a temperature between 15°C and 25°C with 50% to 60% relative humidity. Stored as indicated above, the average shelf life of the products is approximately one year. Avoid temperatures above 50°C. Keep away from sources of ignition, heat and sunlight.

Whenever possible use in a well-ventilated environment.

Do not use on electrical or electronic equipment.

Do not use out-of-doors at a temperature below <5°C or in strong sunshine or rain.

As with all handling and storage operations, NO SMOKING is very strongly recommended.

PACKAGING

.....

Industrial top coats are available in 400ml net size only available in boxes of 6 aerosols.

Other industrial paints are available in 500 ml (net volume) format and in boxes of 12 aerosols.

HEALTH AND SAFETY

.....

Safety data sheets are available on the internet free of charge: www.quick-fds.com.



INDUSTRIAL TOP COAT

Touch-up paints (400 ml) are formulated with high quality pigments and resins to ensure a quick-drying paint film with excellent adherence to most metallic surfaces.

They are used in a wide range of fields such as the maintenance and care of industrial equipment and pipework, to repair scratched or chipped paintwork on agricultural machinery or construction plant, fencing, etc.


Approximately 65 acrylic resin based RAL colours, in a matt or gloss finish, are kept in stock to meet the requirements of current standards, notably:

- the RAL colours for pipework identification (AFNOR NF X08-100),
the RAL safety colours,
the principal RAL colours for agricultural
or public works machinery and equipment.


In addition, the colour-matching equipment available on one of the Technima Group production sites means that specific colours can also be made available, on request and subject to certain conditions.

THE MAIN RAL REFERENCES USED


RAL warning colours



RAL safety colours



Pipework identification colours
(NF X08-100 standard)



ACRYLIC LACQUERS

.....

Formulated with acrylic resins for fast drying paint with an excellent surface finish. It can be used on a variety of surfaces, particularly metals, in various areas of activity such as touching-up paintwork on agricultural machinery or construction plant, fencing, industrial maintenance and paint repairs, and to identify pipework (RAL safety and warning references).

In addition, an acrylic resin-based metallic finish paint is also available. Ideal for restoring a metallic aspect to surfaces it can be applied directly to the metal or over a primer.

.....



Standard references available on stock in 400 ml
Availability in other RAL colours on demand and under conditions of quantity, cost and delay

| | | | | |
|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|
| REF: 471003B RAL 1003 Gloss | REF: 471004B RAL 1004 Gloss | REF: 471007B RAL 1007 Gloss | REF: 471013B RAL 1013 Gloss | REF: 471015B RAL 1015 Gloss |
| REF: 471018B RAL 1018 Gloss | REF: 471021B RAL 1021 Gloss | REF: 471023B RAL 1023 Gloss | REF: 471028B RAL 1028 Gloss | REF: 472000B RAL 2000 Gloss |
| REF: 472002B RAL 2002 Gloss | REF: 472004B RAL 2004 Gloss | REF: 472010B RAL 2010 Gloss | REF: 472011B RAL 2011 Gloss | REF: 473000B RAL 3000 Gloss |
| REF: 473001B RAL 3001 Gloss | REF: 473002B RAL 3002 Gloss | REF: 473003B RAL 3003 Gloss | REF: 473020B RAL 3020 Gloss | REF: 473031B RAL 3031 Gloss |
| REF: 474001B RAL 4001 Gloss | REF: 474008B RAL 4008 Gloss | REF: 474010B RAL 4010 Gloss | REF: 475002B RAL 5002 Gloss | REF: 475005B RAL 5005 Gloss |
| REF: 475008B RAL 5008 Gloss | REF: 475010B RAL 5010 Gloss | REF: 475011B RAL 5011 Gloss | REF: 475012B RAL 5012 Gloss | REF: 475013B RAL 5013 Gloss |
| REF: 475015M RAL 5015 Mat | REF: 475017B RAL 5017 Gloss | REF: 476001 RAL 6001 Gloss | REF: 476002B RAL 6002 Gloss | REF: 476005B RAL 6005 Gloss |

.....

PROPERTIES

- Fast drying
 - Easy to apply, both a first coat additional coats as required
 - Particularly good covering power
 - A very flexible paint film with a superb gloss finish
 - Long-lasting even outdoors
- Good adhesion to a range of different surfaces
 - Touch dry (ASTMD-1640 ISO 1517): 10 to 15 minutes
 - Completely dry (ASTMD-1640 ISO 1517): 12 hours
 - Temperature resistance: 120°C
 - Leave to dry for 15 minutes between coats
 - Dry film thickness: 15µ/coat

| | | | | |
|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|
| REF: 476009B RAL 6009 Gloss | REF: 476010B RAL 6010 Gloss | REF: 476011B RAL 6011 Gloss | REF: 476012B RAL 6012 Gloss | REF: 476018B RAL 6018 Gloss |
| REF: 476024B RAL 6024 Gloss | REF: 476028B RAL 6028 Gloss | REF: 476032B RAL 6032 Gloss | REF: 477001B RAL 7001 Gloss | REF: 477005B RAL 7005 Gloss |
| REF: 477012B RAL 7012 Gloss | REF: 477016B RAL 7016 Gloss | REF: 477021B RAL 7021 Gloss | REF: 477023B RAL 7023 Gloss | REF: 477024B RAL 7024 Gloss |
| REF: 477032B RAL 7032 Gloss | REF: 477035B RAL 7035 Gloss | REF: 477039B RAL 7039 Gloss | REF: 478002B RAL 8002 Gloss | REF: 478012B RAL 8012 Gloss |
| REF: 478016B RAL 8016 Gloss | REF: 478017B RAL 8017 Gloss | REF: 478019B RAL 8019 Gloss | REF: 479003B RAL 9003 Gloss | REF: 479005B RAL 9005 Gloss |
| REF: 479005M RAL 9005 Mat | REF: 479006B RAL 9006 Gloss | REF: 479010B RAL 9010 Gloss | REF: 479010M RAL 9010 Mat | REF: 479016B RAL 9016 Gloss |

☐ satin finish possible

SPECIFICATIONS

Composition

Binder: acrylic
Solvent: blend of solvents, free from lead and heavy metals
Propellant: dimethyl ether

INSTRUCTIONS FOR USE

- Thoroughly shake the aerosol for at least 2 minutes before use to ensure the pigments are correctly mixed.
- The surface must be clean, dry and free from grease.
- Degrease the surface to be treated, remove rust and dust.
- To improve adhesion, it is recommended to apply an undercoat prior to use, depending on the condition of the surface to be treated.
 - Spray at a distance of 25 cm from the surface. Best results are obtained by applying several thin coats in different directions rather than a single thick coat. Coverage approximately 2m² per can according to the application conditions and the state of the surface to be treated.
 - If appropriate, carry out a test on an unobtrusive area beforehand to verify the compatibility of the paint with the surface.

MANUFACTURER'S COLOURS - COUNTERTYPES

.....

In addition to offering a wide variety of standard colours, Technima offers you the possibility of matching the paint shade of your choice.

Countertyping consists of copying a colour sample (tone, value and saturation).
Technima has chosen to adapt its offer and provides you customised shades that meet your needs.

All our countertypes are formulated with the same care and quality of components as our traditional paints. This gives the product fast drying and excellent adhesion on a wide variety of substrates. Available in 400ml.

.....



ASKING US FOR A COUNTERTYPE IS :

.....

- An infinite range of shades thanks to the colorimetric tinting equipment in one of our group's production units
- A colour manufactured with as much precision as your request
- Fast processing of the latter
- Professional technical assistance

A truly made-to-measure service by Technima.

REF: 450003KN4
400ml



REF: 450003KN8
400ml



REF: 450006KO
400ml



REF: 450008JCBJ
400ml



REF: 450002YJ
400ml



MARKING ACCESSORIES

.....

To facilitate the work of professionals in industrial and agricultural sectors, TECHNIMA developed handy tool allowing SOPPEC COLORS aerosol use.



MARKING PISTOL HANDLE

.....

The marking pistol handle brings ease and comfort of application to its user

.....

REF : 444000



PROPERTIES

.....

- It is light and ergonomic thanks to the choice of materials and a design studied for user comfort.
- It adapts to all aerosol sizes thanks to a clip.
- It is easy to put on and take off.
- It guarantees better spray control.
- It facilitates the application of the paint and prevents the user from staining his hands or fingers. It also helps to reduce the fatigue of the members mentioned above.
- It avoids drips.
- It can be used with gloves.
- It is recyclable.

OTHER INDUSTRIAL PAINTS

.....



ADHESION PRIMER

High quality universal primers, offering rapid drying and high coverage, ideal for surface preparation (metal, wood, plastic and many others) before paint-spraying.

Can be used on bare steel and lightly rusted surfaces.

Also suitable for plastic and wood. Available in 500ml.
available by boxes of 12 aerosols

WHITE
REF: 470101
500ml



RED
REF: 470102
500ml



GREY
REF: 470103
500ml



PROPERTIES

- Excellent adhesion (for both smooth and porous surfaces), covers well and is easy to sand.
- Corrosion-resistant
- Heat resistance: 110°C
- Dust dry after 10 to 15 minutes
- Touch dry after 15 to 25 minutes
- Leave to dry for 12 hours between coats

(Figures given for information only, actual data's will depend on the temperature, paint thickness, humidity etc)

SPECIFICATIONS

Composition

Binder: acrylic

Solvent: blend of solvents

Propellant: dimethyl ether

INSTRUCTIONS FOR USE

- Shake thoroughly the aerosol for at least 2 minutes before use to ensure the pigments are correctly mixed.
- The surface must be clean, dry and free of grease. Remove all residues of varnish, rust, etc, then sand. When using out-of-doors, remove any moss or algae present on the surface. Cover the surrounding areas.
- Spray at a distance of 25 cm from the surface. Best results are obtained by applying several thin coats in different directions rather than a single thick coat.
- Leave to dry for approximately 20 minutes between coats.

RUST CONVERTOR

The SOPPEC COLORS rust converter is a “two-in-one” product, stabilising the rust and acting as a primer. Ideal for restoring rusted areas of paintwork on machinery, vehicles or other metal equipment: fencing, chassis, etc.

Thanks to its deep penetration, it forms a high quality protective film, making this an effective and long-lasting treatment.

Available in 500ml.

REF: 470105



PROPERTIES

- Application temperature: max 80°C, peak 150°C
- Dust dry after approximately 30 minutes
- Leave to dry for 5 hours between coats
(Figures given for information only, actual times will depend on the temperature, paint thickness, humidity etc)
- Vapour pressure at 20°C: 4 bar
- pH: 4 - 4.5
- Spray flow: 0.8 g/sec.

SPECIFICATIONS

Composition

Binders: blend of polyvinyl butyral, resins and solvents: free from heavy metals and mineral acids

Colour: clear brown liquid, on metal it turns dark blue/black once dry

Propellant: dimethyl ether

INSTRUCTIONS FOR USE

- Shake thoroughly before use.
- Remove any paint and rust residues with a metal brush or sander. The surface must be clean, dry and free of grease. When using outdoors, remove any moss or algae present on the surface. Cover the surrounding areas.
- Spray at a distance of 25 cm from the surface.
- Apply several light coats (+/- 4 coats).
- Leave to dry for approximately 20 minutes between coats.
- Once the final coat is completely dry, it is recommended to sand the surface to improve adhesion.

ZINC SPRAY GALVA

.....

A range of 4 galvanising paints:

2 mat galvanising paints: one fast-drying

2 aluminium gloss galvanising paints: one fast-drying

Available in 500ml. Available by boxes of 12 aerosols

.....



GALVA Zinc Aluminium gloss



Galva Zinc Aluminium fast-drying



GALVA Zinc matt 97%



Galva Zinc matt fast-drying

.....

INSTRUCTIONS FOR USE

.....

- Shake thoroughly before use. Remove any residual paint and rust using a wire brush or sander. The surface must be clean, dry and free of grease. When using outdoors, remove any moss or algae present on the surface. Cover the surrounding areas.
- Spray at a distance of 25 cm from the surface.
- Apply several light coats.
- Leave to dry for approximately 20 minutes between coats.

GALVA ZINC ALUMINIUM GLOSS

A purpose-designed paint for the cold galvanising of iron and steel surfaces, can be used to touch-up and repair damaged areas of altered zinc, for steel parts, bodywork, fencing, metal buildings and heavy industry.

This primer provides a tough, corrosion-resistant and protective gloss coating to iron and steel, leaving the surface with a newly-galvanised appearance.

REF: 470201

500 ml NET



PROPERTIES

- Very good adhesion, provides an excellent surface for painting
 - Chemical-resistant
 - Heat resistant up to 250°C
 - Dust dry after 10 to 15 minutes
 - Touch dry after 20 to 30 minutes
 - Leave to dry for 24 hours between coats
- (Figures given for information only, actual times will depend on the temperature, paint thickness, humidity etc)*

SPECIFICATIONS

Composition

Binder: epoxy-ester
Pigments: zinc and aluminium with high degree of purity
Propellant: diméthyl ether

GALVA ZINC ALUMINIUM FAST-DRYING

Fast-drying cold-galvanising paint for minor repairs, resulting in a shiny new-metal appearance.

REF: 470200

500 ml NET



PROPERTIES

- Heat resistant up to 110°C
 - Dust dry after 5 to 10 minutes
 - Touch dry after 10 to 20 minutes
 - Leave to dry for 2 hours between coats
- (Figures given for information only, actual times will depend on the temperature, paint thickness, humidity etc)*

SPECIFICATIONS

Composition

Binder: acrylate
Pigments: zinc and aluminium with a high degree of purity
Propellant: diméthyl ether

GALVA ZINC MATT 97%

Paint very rich in zinc to prevent corrosion affecting bare steel and galvanised metal surfaces.

Forms a protective coat that can also serve as a primer for any other type of paint.

Can be used on all types of pipework.

Very high conductivity, can be used for spot welding.

REF: 470203

500 ml NET



PROPERTIES

- Very good adhesion, provides an excellent surface for painting
- Chemical-resistant
- Long-term electrochemical protection
- Heat resistant up to 350°C
- Dust dry after 10 to 15 minutes
- Touch dry after 20 to 30 minutes
- Leave to dry for 24 hours between coats

(Figures given for information only, actual data's will depend on the temperature, paint thickness, humidity etc)

SPECIFICATIONS

Composition

Binder: epoxy ester

Pigments: zinc with a high degree of purity

Propellant: dimethyl ether

GALVA ZINC MATT FAST-DRYING

A fast-drying, cold galvanising paint that can be used to provide corrosion-protection for metals, steel and iron, for quick maintenance during construction or industrial production.

REF: 470204

500 ml NET



PROPERTIES

- Heat resistant up to 250°C
- Dust dry after 5 to 10 minutes
- Touch dry after 10 to 20 minutes
- Leave to dry for 4 hours between coats

(Figures given for information only, actual data's will depend on the temperature, paint thickness, humidity etc)

SPECIFICATIONS

Composition

Binder: acrylate

Pigments: zinc with a high degree of purity

Propellant: dimethyl ether

HEAT RESISTANT COATING

.....

Heat-resistant paints that can be used on surfaces exposed to very high temperatures such as: steam pipes, engines, exhaust pipes, radiators, etc.

They can be used to coat new, bare, shot, rusted or painted steel, as long as it has been correctly prepared before applying the HT paint.

Available in 500ml.

.....

ANTHRACITE:
REF 470800



BLACK:
REF 470802



.....

PROPERTIES

.....

- Excellent adhesion
- High resistance to petrol and chemicals
- Heat resistant up to a peak temperature of 650°C
- Dust dry after 5 to 10 minutes
- Touch dry after 10 to 15 minutes
- Completely dry after curing for 30 to 60 minutes at 200°C

(Figures given for information only, actual times will depend on the temperature, paint thickness, humidity etc)

SPECIFICATIONS

.....

Composition

Binder: silicone resin

Pigments: Heat resistant colour pigments

Propellant: dimethyl ether

INSTRUCTIONS FOR USE

.....

The surface must be clean, dry and free of grease. Remove all residual paint, varnish, rust, etc, then sand. When using out-of-doors, remove any moss or algae present on the surface. Cover the surrounding areas. Shake from time to time during use. Spray at a distance of approximately 25 to 30 centimetres from the surface. When dry, heat to a temperature of at least 200°C for 30 to 60 minutes to fully harden the paint coating.

SPECIAL PAINTS

.....

2 additional special paints are available in SOPPEC COLORS range to prepare construction surfaces for painting: one is designed to mask surface stains and the other simulates the effect of a cement coat to render a surface completely smooth.



STAIN BLOCKER



A purpose-designed paint to mask stains such as: grease marks, water stains, solvent residues, tar or glue marks. Dries quickly to a matt white finish.
Can be applied to walls, ceilings, concrete, plaster, etc.
Usable both inside and out-of-doors.
Suitable as a primer before painting walls or ceilings.
Can be applied before a coat of cement paint.
Available in 500ml.



REF: 470001



PROPERTIES



- Excellent adhesion
- High scratch and impact resistance
- UV-resistant and does not yellow over time
- Fast drying
- Matt satin finish
- Touch dry after 10 min.
- Completely dry after 20 min.

(Figures given for information only, actual data's will depend on the temperature, paint thickness, humidity etc)

INSTRUCTIONS FOR USE



The surface must be clean, dry and free of grease. Remove all residual paint, varnish, rust, etc, then sand. When using out-of-doors, remove any moss or algae present on the surface. Cover the surrounding areas. Spray at a distance of approximately 25 to 30 centimeters from the surface.

Leave to dry for 30 min. between coats if applying several thin layers.

SPECIFICATIONS



Composition

Binder: acrylate copolymers
Solvents: blend of solvents
Propellant: dimethyl ether

SPACK SPRAY



Polyurethane dispersion based paint that creates a “cement” effect finish.
Particularly useful to touch-up cement coatings or renders.
Can be applied to a wide range of building surfaces: wood, cement, plastic.
Available in 500ml.



REF: 470011



PROPERTIES

- Colour: white
- Density at 20°C: 1.2
- Rapid drying
- Can be used in addition to a stain block paint when preparing a surface prior to painting.

SPECIFICATIONS

Composition


Binders: polyurethane dispersion
Propellant: dimethyl ether

INSTRUCTIONS FOR USE

The surface must be clean, dry and free of grease. Remove all residual paint, varnish, rust, etc, then sand. When using out-of-doors, remove any moss or algae present on the surface. Cover the surrounding areas. Shake from time to time during use. Spray at a distance of approximately 25 to 30 centimeters from the surface.

Paint can be applied in a thin or thick coat according to the touch-up work required.

Apply at a temperature between 10°C and 30°C. The viscosity of the paint varies according to temperature and the texture may thicken at temperatures below 10°C.

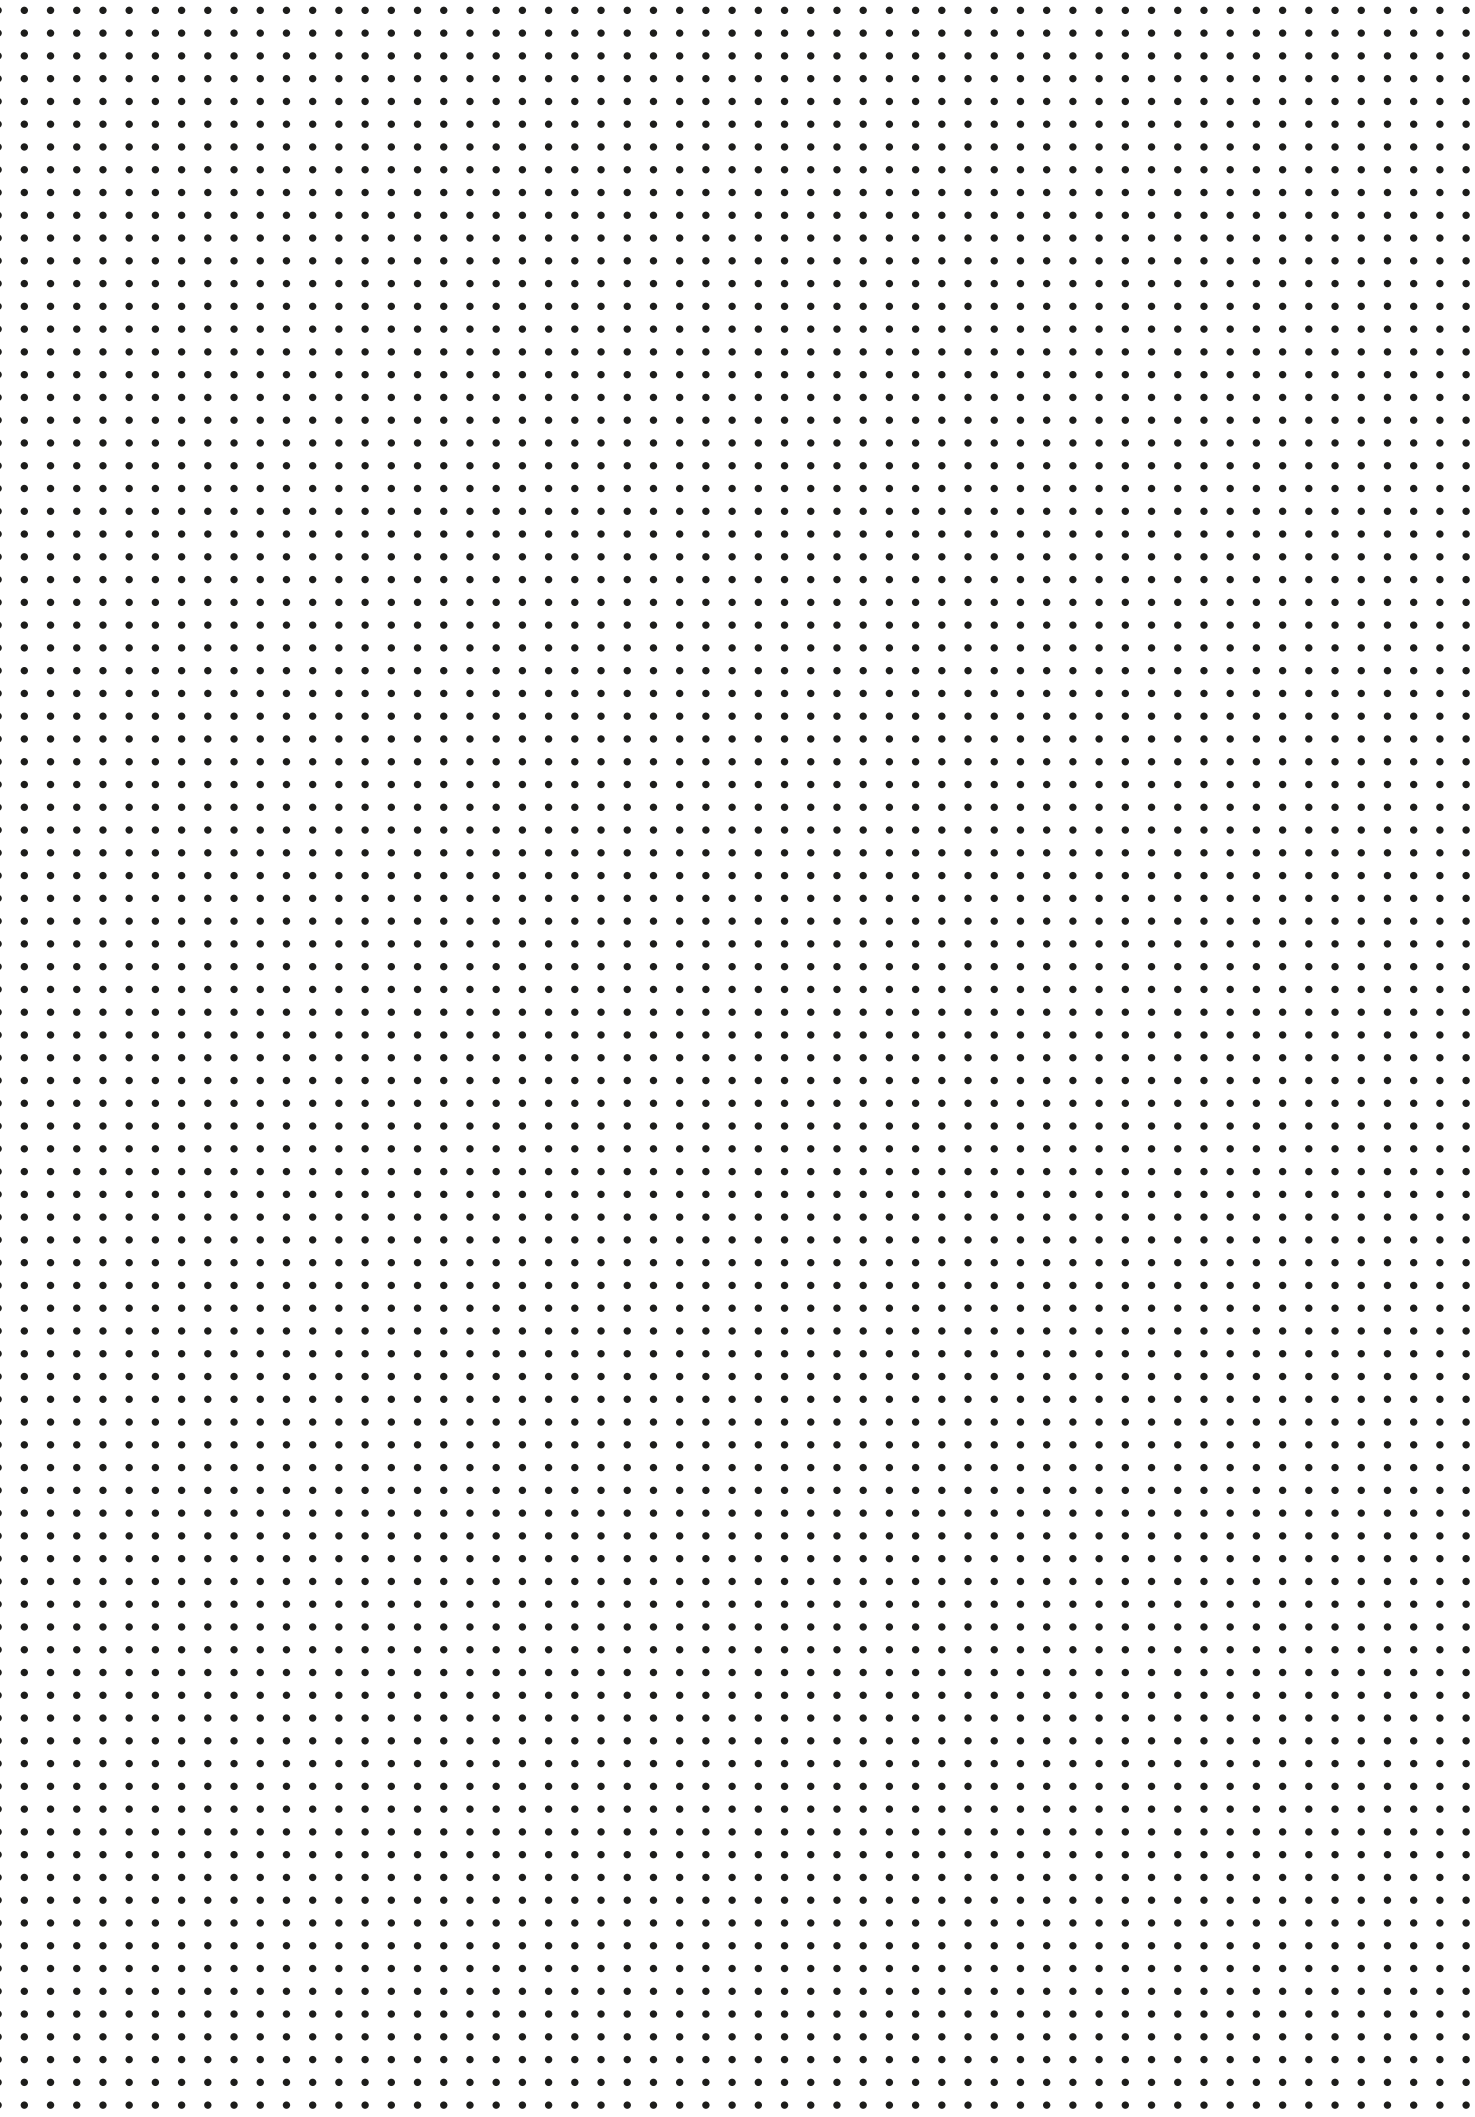



Technima Central
Kreuzerweg 13 - 77955 Ettenheim
GERMANY
T. +49 (0) 7822 789 00 0
central@technima.com

Technima Nordic
Krokslätts torg 5 SE-431 37 Mölndal
SWEDEN
T. +46 (031) 102 190
info@technimanordic.com

Technima Benelux
Hambakenwetering 22A
5231 DC 's- Hertogenbosch
NETHERLANDS
T. +31 736 314 345
info@technimabenelux.com

CIA Technima SUD EUROPA
SRL- Via Santa Brigida,
43- 10060 Roletto (TO)
ITALY
T. +39 0121 542 542
ciasudeuropa@technima.com

Technima France
Z.I. 16440 NERSAC
FRANCE
Tél. +33 (0)5 45 90 93 12
Fax. +33 (0)5 45 90 58 67
technimafrance@technima.com

www.technima.com