




ATIM - EL200/400 SERIES Automatic ticket issuing machine

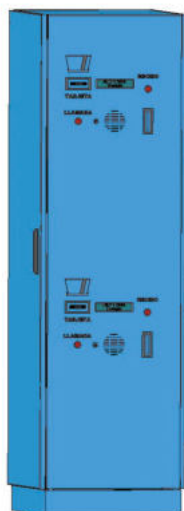

MAIN FEATURES

- Industrial cabinet with protection to category IP55
- Silk-screen printing front panels
- Up to three external doors with lock
- Two independent levels for ticket validation
- Thermal printer for receipt issuing
- Easy access to all internal components
- Environment control for temperature and humidity
- Control by industrial PC
- Automatic control of alla additional lane transit services
- Front-end collection box for validated tickets
- LCD display on each level for information to the driver

TECHNICAL SPECIFICATIONS

OVERALL DESCRIPTION

- **Outline dimesions** : 1800 (H) x 600(W) x 700 (D) mm
2000 (H) x 600(W) x 800 (D) mm
- **Weight** : 200 kg (Approximately)
- **Cabinet covers thickness** : 1.5 - 2 mm
- **Frame finishing** : Zinc-plated
- **Color** : RAL painted custom-made
- **Protection** : Against dust and water accordingly to IP55
- **Ticket module** : EL8000 ATPM EL500 (85mm) series
EL9000 ATPM EL600 (120mm) series
- **Recipt module** : Thermal printer
- **Transit detection** : By loop controller (PL, TL1, TL2)

CONTROL METHOD

- **Computer** : Industrial PC
- **i/o data lines** : Up to 48 AC/DC OUTPUT on 2 PCB's

FRONT PANEL

- **Types** : Silk-screen printing panels
- **User indicators** : LCD display
- **User interface** : Receipt request pushbutton
Call operator push button
Intercom line

AIR CONDITIONING

- **Heater** : Two selections 500/1000w
- **Thermostat** : Adjustable from 5 to 40° C

POWER SUPPLY

- **Model** : Switching type (240W or 500W)
- **Input** : 200-240 VAC / 2.4A 50 / 60Hz
88-264VAC / 3.5A 47/63Hz
- **Output** : 24V / 10A or 5V / 5A